


# TRIM™ MQL™ 100

## Minimum Quantity Lubrication Fluid



TRIM MQL™ 100 is a high performance, vegetable-ester based micro lubrication fluid. It is fully compatible with all “micro lube” and micro mist systems. MQL 100 contains a blend of environmental and operator friendly materials that provide very high levels of EP and boundary lubrication to control built up edge (BUE) and sliding friction. MQL 100 outperforms the competition in sawing, drilling, tapping, and milling, to name but a few. In situations where it is impractical to use a micro lubrication applicator, MQL 100 may be manually applied to the tool or work piece.

### Specialty

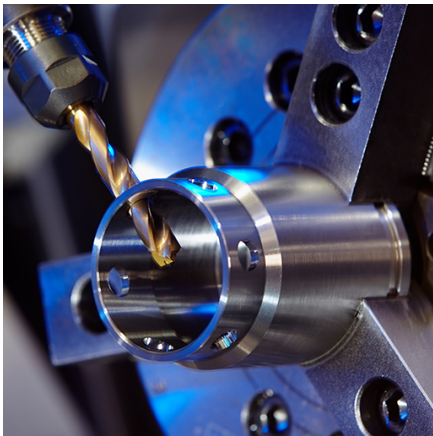

#### **Specialty suited to your operation:**

*TRIM™ specialty fluids are specifically tailored to unique needs, such as very high-pressure or high-volume applications, or to address specific code or approval requirements.*

*Whatever your problem or unique requirement, there is always a TRIM solution for you.*

#### **Choose MQL100:**

- Very low mist
- Environmentally friendly, renewable resource based
- Low consumption, out-performing the more expensive products
- Easily water washable – does not produce hard to remove residues
- Promotes superior finish and tool life and is compatible with all materials
- Has been extensively tested and proven in all major brands of micro lube applicators
- Very high levels of lubricity with minimum quantities of material at the point of cut for high material removal

#### **MQL100 especially for:**

**Applications** — drilling, milling, reaming, sawing, and tapping

**Metals** — ferrous metals and nonferrous metals

**Industries** — general industry and job shop

**MQL100 is free of** — boron, chlorinated EP additives, nitrites, phenols, and silicone

#### **Health and Safety**

Request SDS



# TRIM™ MQL™ 100

## Minimum Quantity Lubrication Fluid



### Application Guidelines

- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.masterfluids.com/ap/en-ap/distributors/index.php>, your District Sales Manager, or email us at [apac-info@masterfluids.com](mailto:apac-info@masterfluids.com).

### Physical Properties Typical Data

Color (Concentrate)	Yellow
Odor (Concentrate)	Mild
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D92-90)	> 160°C
Viscosity	8.75 mm <sup>2</sup> /s @40°C

### Ordering Information

20-liter pail


204-liter drum

TRIM™ MQL™ 100 | ©2016-2026 Master Fluid Solutions™ | 2026-05-11

### Additional Information

- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM™ is a trademark of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=ap\\_en-ap\\_MQL100](https://2trim.us/di/?i=ap_en-ap_MQL100)



4/F, Block H, No. 200 Jinsu Road Pudong,  
Shanghai

上海市浦东新区金苏路200号H栋4楼,  
201206

China

+86 21 6807-0101, 400-801-3590

[info@masterchemical.com.cn](mailto:info@masterchemical.com.cn)

[masterfluids.com/ap/en-ap/](https://www.masterfluids.com/ap/en-ap/)

